

Health and Safety Management System

Health and safety prevention



Contents

1. Our major commitments	2
1.1. Health and safety policy.....	2
1.2. Health and Safety Leadership	3
1.3. BYTP Health and Safety Basics: Life-Saving Rules and Basics Requirements.....	4
2. Health and safety management system	5
2.1. ISO 45001 certified.....	5
2.2. Documentary system	6
2.3. Health and Safety Objectives	6
2.4. Business organization	7
2.5. Organization of health and safety prevention	8
2.6. Consideration of interested parties	8
2.7. Consultation and participation of collaborators.....	9
2.8. Skill developpement.....	9
2.9. Communication.....	11
2.10. Identification of applicable requirements	12
2.11. Risk analysis management	12
2.12. Operational requirements	14
2.13. Management of service providers and subcontractors.....	18
2.14. Prevention of hardship	18
2.15. Integration of technological evolution	19
2.16. Emergency management	19
2.17. Event management.....	20
2.18. Serious events and HiPo	20
2.19. Change management.....	21
2.20. Conformity assessment.....	22
2.21. Performance measurement and analysis	23
2.22. Non-conformities	24
2.23. Equity Management.....	24
2.24. Continuous improvement.....	25
3. BYTP Health & Safety Basics	26

1. Our major commitments

Our major commitments:

- A Health and Safety policy with an objective of zero fatal and serious accidents
- The development of Health and Safety leadership at all levels of our organization
- Applying our Fundamentals: Life-Saving Rules and H&S Basics Requirements

1.1. Health and safety policy

BYTP implements a health and safety policy established by our General Management aimed at ensuring the safety, health and physical and mental integrity of all employees and any interested party involved in our activities with one major objective:

0 fatal or serious accident

The policy is communicated to employees and interested parties. It presents the main areas of prevention deployed on our worksites, which are implemented:

- by deploying a strong Safety Culture through the assurance of our leadership in all our activities and at all levels of the company,
- by protecting the health and safety of employees by relying on an appropriate management system covering all of our activities, in compliance with our requirements and legal requirements, thus allowing the continuous improvement of the system of management and our performance,
- by controlling our major risks that could lead to a serious or fatal accident,
- by analyzing serious and high-potential events in order to study their causes and deploy preventive actions in order to further ensure the safety of everyone on our worksites,
- by reducing hardship by studying and improving work situations using appropriate tools, methods and organization from the design of operations,
- by preventing the risks associated with the consumption of alcohol or illicit substances,
- by supporting the stakeholders under our responsibility (subcontractors, suppliers and temporary workers) in their prevention approach,
- by deploying the means necessary for our objectives,
- by managing relevant indicators which are the key elements of our success and attest that the system is applied, updated and understood,
- by the insurance for all to be able to stop any task exposing them or any other person to an at risk situation.

On the project, the health and safety policy is broken down by the drafting of a health and safety charter signed by the Project Manager, the partners and the client if desired. When the projects are carried out in a consortium, this charter sets out the main orientations of the BYTP policy and integrates the requirements specific to the project, as well as the applicable elements of the other parties involved in the project (client, partners, etc.).


1.2. Health and Safety Leadership

Leadership in Health and Safety is exercised within the entire managerial line of BYTP via specific training delivered to more than 350 Top managers from all our entities and which ensures its cascading towards all management up to Team Leaders thus raising awareness among our companions through exchange and exemplary behavior.

This strong Health and Safety leadership is also enriched and reinforced by BYTP's managerial line by:

- being present in the field and by involving our service provider companies,
- developing dialogue,
- integrating security at all levels of the organization, and in each task / document,
- clarifying everyone's roles and responsibilities,
- sharing the safety vision and establishing a climate of trust,
- being exemplary in respecting safety requirements and its commitments, on a daily basis and in the management of emergency situations,
- promoting team cohesion and exchanges,
- promoting good health and safety practices.

The key roles of the Security Leader are known by the main functions of our projects.

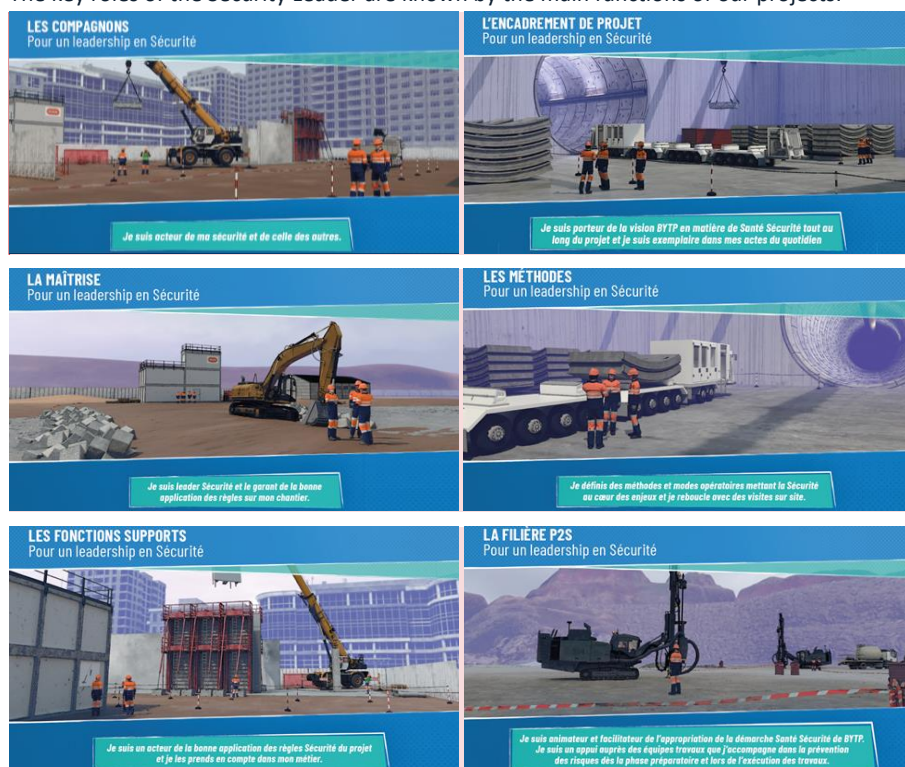

Commented [MF1]: To be changed for english versions

1.3. BYTP Health and Safety Basics: Life-Saving Rules and Basics Requirements

By studying the accidentology of construction activities, BYTP has identified 5 Major Risks on which the safety prevention rules have been reinforced:



Commented [MF2]: To be changed by english versions

In its desire to anchor its Safety Culture, BYTP deploys its basics requirements and Lifesaving Rules, throughout the world and on all its worksites. Those H&S basics are presented in appendix 1. The Lifesaving Rules are associated with the sources of serious accidents, which are the 5 Major Risks and the Fundamental Requirements associated to recurrent accidents with low consequences.

These requirements apply to everyone: workers and employees of BYTP, temporary workers, subcontractors and partners.


Specific trainings are provided to support employees, partners and subcontractors to meet the required level of these standards.

2. Health and safety management system

2.1. ISO 45001 certified

Our Health and Safety management system is ISO 45001 certified by AFNOR.

Based on continuous improvement, our management system applies to all of Bouygues TP's activities, guiding the company towards a high level of performance in terms of health and safety.

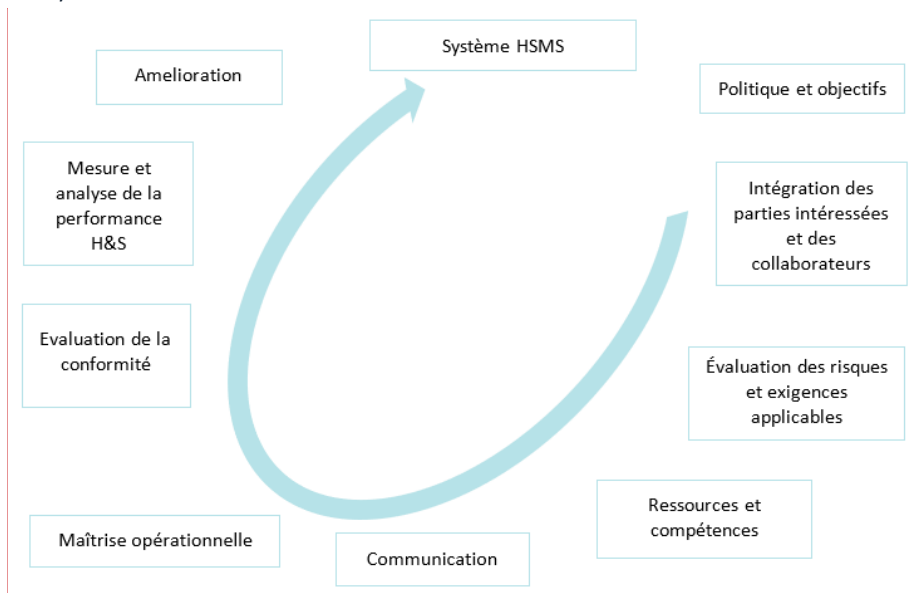

Commented [MF3]: Faire version anglaise


The Health and Safety management system is based on:

- an organization: the various actors in the company are informed and trained in their field of intervention in health and safety (job description, job training, etc.).
- the actions are planned: a risk assessment is carried out in order to identify the dangers and implement preventive and protective actions,
- implementation and operation: monitoring of the implementation of preventive measures is programmed,
- temporary workers and subcontractors are integrated into our approach,
- all events are monitored and investigated with simple or in-depth root cause analysis,
- audits, health and safety visits, evaluation are carried out in order to verify the effectiveness of the application of the system and capitalize on the good practices observed on the projects,
- health and safety reviews are scheduled to assess the level of performance.

2.2. Documentary system

BYTP's health and safety management system is structured as follows:

- a health and safety policy,
- a health and safety manual,
- Health and Safety standards (setting the health and safety prevention requirements),
- MOSE + (Business Standard Operating Mode),
- internal procedures,
- application guides.

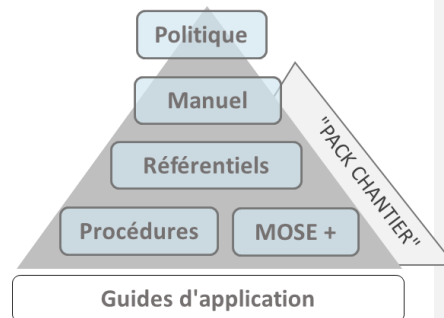

On project, the documentary architecture of Health and Safety documents consists of:

- a health and safety charter/policy,
- a health and safety management plan, "cap document" describing the structuring principles of the health and safety management system on the project,
- operational application procedures,
- risk analysis carried out on the basis of operating methods established by the construction company,
- forms, which are records.

2.3. Health and Safety Objectives

BYTP's health and safety objectives are defined, implemented and shared at all levels in the company:

- general management: the objectives are defined in accordance with the health and safety policy, during the health and safety process,
- operations and production departments: monitored and reviewed during BYTP's management and process reviews. They take up BYTP's health and safety objectives when they are identified as responsible for the action and apply them for their project scope: by setting specific objectives for the project according to contractual and legal requirements and the risks and opportunities identified.

2.4. Business organization

In France and abroad, Bouygues Travaux Publics carries out transport infrastructure and civil engineering projects in the fields of energy and the environment.

Bouygues Travaux Publics has recognized expertise in the development and management of complex projects.


The success of Bouygues Travaux Publics is based on its teams, their expertise and their mindset. It is also based on a culture of innovation and a proactive R&D policy. Organized by geographic sector worldwide, Bouygues Travaux Publics brings specific technical expertise to the local challenges of each project.



Bouygues Travaux Publics has been supporting causes in the general interest for more than 10 years, particularly for employment, professional integration, education and health. Each project is an opportunity to create value for territories and populations.



Bouygues Travaux Publics is organized around its 8 major businesses with the aim of satisfying customers and other stakeholders:

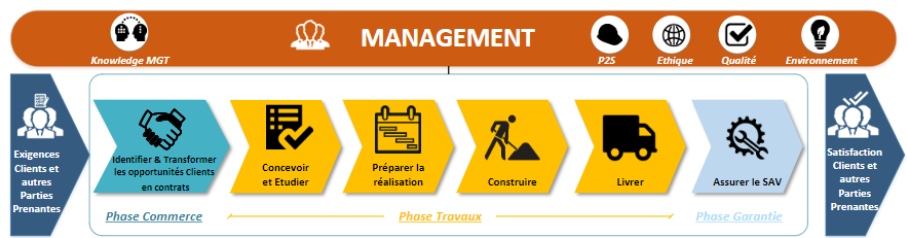

2.5. Organization of health and safety prevention

Bouygues Travaux Publics has a Health and Safety Prevention Department. This is based on values essential to its proper functioning and an associated action plan. The Health and Safety Prevention Department is organized into sectors that report directly to the General Management of Bouygues Travaux Publics while following the guidelines given by Bouygues Construction (parent company) in terms of health and safety.

Management is organized around three support departments:

- Perform Health and Safety Prevention Service (system, compliance control, reporting and accidentology, calls for tenders and expertise),
- Technical safety training service,
- Ergonomics department.

And two operational services:

- Bouygues Public Works France Switzerland,
- Bouygues Public Works International.

These 2 perimeters composed of work sites and agencies are organized with prevention officers and site supervisors. These employees work with all the players working on or for the worksites. The prevention sector ensures at all times that the necessary resources are mobilized within the organization, in terms of staff, skills and expertise.

2 areas of expertise complete this organization:

- the support function referents: these are privileged interlocutors of the functional departments. Their mission is to support the deployment of standards and Health and Safety Prevention action plans within them, as well as to report expectations and proposals to the Health and Safety Prevention Department,
- the thematic experts who are the source of proposals for improving organizations and processes. They are the contact points for Pôle TP employees looking for information on their subject of expertise.

All hierarchical levels within Bouygues Travaux Publics are involved in the Health and Safety approach. The roles, responsibilities and tasks in terms of health and safety of the various actors (Project manager, works manager, supervisor, journeyman, etc.) are defined and known.

2.6. Consideration of interested parties

Interested parties are an integral part of our health and safety management system, in particular:

- customers by integrating their health and safety requirements,
- the worksite environment by limiting the nuisance associated with worksite activities and promoting the development of local health and safety resources,
- the partners during joint work, taking into account their own requirements,
- temporary work companies within the framework of an annual agreement with the company, integrating health and safety objectives,
- subcontractors by supporting their management,

- employees by ensuring a healthy and safe working environment and appropriate tasks.

Bouygues Travaux Publics also takes into account the well-being of its employees as part of its "HARMONIES" Quality of Life at Work approach. It aims to adapt work in the company to cultural, societal and generational changes.

Six major themes are deployed with specific actions implemented:

- managerial behavior (training, maintenance, etc.),
- work environment (co-working space , nomadic work, telework, etc.),
- construction site environment,
- parenthood,
- work organization and efficiency (adaptation of meetings, lean management),
- self-management (sponsorship, tutoring, etc.).

On projects, actions are implemented to promote working conditions that promote the well-being of employees, such as:

- annual exchange interviews measuring the balance between professional and personal life,
- spaces on construction sites conducive to the creation of better social ties,
- the implementation of a collaborative process (1/4 hour daily discussion at the start of the shift, for example),
- the development of tutoring for new arrivals,
- systematic on-the-job training ensuring understanding of what is expected of the employee.

2.7. Consultation and participation of collaborators

With the aim of continuously improving our system and promoting a safety culture, Bouygues Travaux Publics encourages employee consultation through several mechanisms:

- the participation,
- to health and safety committees,
- at quarter-hour security,
- risk assessments,
- ergonomic analyses,
- accident investigations,
- the start-of-shift briefing,
- direct involvement in the process of improving the safety culture by promoting the right and the duty to intervene in the event of dangerous situations requiring the work to be stopped.

2.8. Skill developpement

Training plan



Bouygues Travaux Publics' main objective is to employ experienced and qualified personnel, trained to the required level and to provide the necessary instructions to ensure that employees are fully aware of the safety requirements on site.

Throughout the duration of a project, Bouygues Travaux Publics mobilizes staff according to these criteria.

The expected level of competence and health and safety awareness of these personnel is achieved through the development and administration of adequate training by the project's human resources department.

To do this, Bouygues Travaux Publics launched its Training Academy, a training school to maintain the skills of production teams (workers, team leaders, technicians and supervisors) over time and thus improve our performance.

The objective being to guarantee a better mastery of technical gestures from our fundamentals to the specificities of our Professions, but also:

- To improve our productivity, while guaranteeing the preservation of the health and safety of employees,
- To promote adaptability and versatility within our teams,
- To develop the skills of our employees,
- To consolidate, harmonize and make more effective within Bouygues Travaux Publics the monitoring of the training and skills of our Masters and Companions employees.

The type and level of training to be provided is appropriate to the job function and associated risks and takes into account levels of responsibility, ability, language skills and literacy.

The Human Resources Department maintains records of all employees and organizes refresher training.

Worksites evaluate the effectiveness of their safety training programs using one or a combination of the following methods:

- personnel security awareness testing,
- number and importance of dangerous behaviors or situations reported by staff,
- overall project safety performance.

Health and safety induction

The hierarchy of the employee assigned to the project or possibly the Prevention department provides a safety reception where general information about the project, the instructions to be followed and the precautions to be taken in terms of health and safety are presented. This same process is carried out at BOUYGUES TRAVAUX PUBLICS headquarters and branches.

The content of the reception is adapted according to the interventions on the site (assignment at 100%, short-term intervention, visitors, etc.).

Temporary workers, subcontractors and service providers receive the same welcome from the line manager or the prevention department in the context of major projects.

On-the-job training

Following the safety induction, the employee's hierarchy provides training at the workstation. This training is renewed over time for each change of workstation or appearance of a new risk.

The following items are presented during on-the-job training:

- the operating mode(s) of the workstation,
- the machines and products used for this position,
- the dangers and risks related to workstations,
- the means of prevention implemented,
- the collective protections and the specific individual protections to be used for this position.

Authorisation

Certain workstations or activities are subject to an authorization issued by the site management, on the basis of authorization or specific training in safety, for the personnel concerned.

Skills requiring training (internal or external) include foreman, machine driving, use of portable power tools, first aid worker, firefighting, etc. The additional skills are carried out according to the needs of the site.

Authorized personnel are visibly identified (sticker, overalls, badges, etc.).

2.9. Communication

Bouygues Travaux Publics communicates information on health and safety, according to its importance and the level of risk, to all interested parties via different formats/media:

- Annual reports,
- monthly reports,
- Flash (events, best practices, regulations, prevention, etc.
- Dedicated training and campaigns, etc.

Bouygues Travaux Publics organizes world safety days using this opportunity to raise employee awareness of health and safety issues, to organize workshops and discuss these

topics. All of the company's employees attend these days, as well as our customers, partners, subcontractors and service providers.

2.10. Identification of applicable requirements

The applicable requirements are of several types:

- Legal obligations of the country (eg laws, standards, local regulations),
- Rules specific to site requirements (eg SEVESO, site classified as a defense secret),
- Codes, international or local standards and recommendations from recognized institutions (eg NFPA, OPPBTP, CRAMIF/CARSAT),
- Project-specific documentation (Contractual Customer Documents),
- Documentation drawn up for the project (based on the strictest obligation of the Health and Safety Prevention management system of Bouygues Travaux Publics or a partner),
- Etc.

Applicable legal and regulatory requirements are listed and subject to compliance assessment in each country where the company operates.

Specific contractual requirements for each project are identified at the tender stage. Customer requirements are integrated into projects under the responsibility of the Works Manager and are reflected in the operating methods and in the project's health and safety management system.

2.11. Risk analysis management

The risk assessment is carried out in several stages:

- identification of risks,
- initial risk assessment,
- definition of prevention and control measures,
- additional actions if necessary,
- residual risk assessment.

Risks and opportunities are identified and reviewed at several phases of our project management and supervisory activities:

Health and safety approach

Risks and opportunities are assessed during the health and safety approach for the safety management system and reviewed regularly to include any changes in issues, organization, activities, scope.

Register of company health and safety risks

At the company level, the dangers associated with the workstations present in the company are identified, an assessment of the professional risks is carried out, and the associated preventive actions are defined in a register of the dangers and risks.

- when responding to calls for tenders,
- the identification of the main risks and opportunities of the project, of which those in health and safety are identified and documented,
- the identification of hazards, the assessment of risks and the definition of preventive measures are elaborated in the health and safety documents and methods.

During the site preparation phase

The Project Works Manager is responsible for setting up a schedule of health and safety risk assessment workshops. The workshops are:

- either dedicated to design-related risk assessments (for Design & Build projects),
- or dedicated to risk assessments based on the methodologies of the work to be carried out.

These health and safety risk assessments are carried out on the basis of the work program, the work environment, the stakeholders, the execution plan, the design elements, the equipment used and the work methodologies envisaged.

Preparation of works/activities

The works supervisor carries out a risk assessment for all site activities on the basis of established operating procedures, which may be modified following this analysis.

For activities whose risks have been assessed prior to the start of construction, a new assessment is organized if the Works Manager identifies, with the support of the Project Health and Safety Prevention Manager, one or more changes compared to the initial conditions of execution. (organization, methodology, material and equipment, organizational and human resources, work environment).

The Works Manager organizes a health and safety launch at the start of the project and for each activity presenting major risks.

Start of activities

Prior to the start of each activity, the site manager and/or the team leader trains the workers at the workstation and assesses them in order to guarantee their knowledge and understanding of the dangers present, the risks incurred and the preventive measures.

Preparation of daily tasks

On the day an activity is carried out, a risk review is carried out through Safety Briefings. Before the start of daily tasks, a start-of-shift briefing brings together the team leader, the prevention officer if applicable and the companions to:

- take stock of the activities of the day before,
- present the day's activities,

- examine the impact of other activities,
- jointly identify the dangers and risks for the tasks to be performed and finalize the preventive measures for the tasks to be performed.

2.12. Operational requirements

The operational activities are detailed in the procedures, instructions, operating methods which apply to the works and integrate the health and safety requirements.

The list of topics presented below is not exhaustive:

- works under road traffic,
- confined space work,
- Electric logging,
- temporary works,
- hot work,
- work at height,
- handling/lifting,
- maritime and river works,
- work near existing networks,
- work near railway tracks,
- underground works,
- installation and dismantling of equipment,
- works of art repair,
- special works and deep foundations,
- demolition work,
- rescue management,
- management of hazardous products,
- emergencies associated with all of these activities.

Construction site safety management

The major challenge in terms of securing a site lies in respecting the neighboring environment. This involves thinking about protecting and securing the sites, thus making it possible to minimize the impact linked to the activities. The sites are secured as required by the deployment of type measures:

- construction palisades,
- portals,
- guarantee of access and passage of the emergency services,
- guarding and video surveillance,
- lighting,
- storage area,
- bungalow and cantonment area.

The cantonment areas are equipped with canteens, changing rooms, toilets and separate rooms when necessary. The security of the cantonment areas being ensured:

- by the cleanliness of the cantonments with regular cleaning,
- by the rules of hygiene,
- by the electrical checks of the installations,
- by fire prevention,
- etc

and storage management




Logistics is a key factor in the planning, production, financial and safety success of the various construction sites.

The benefits of logistics optimization being:

- The improvement of Health and Safety on the project,
- Waste reduction,
- A minimal need for on-site storage.

The on-site storage areas are optimized, the anticipated goods routes as well as the means of lifting and handling are ensured adequate for the material delivered and stored.

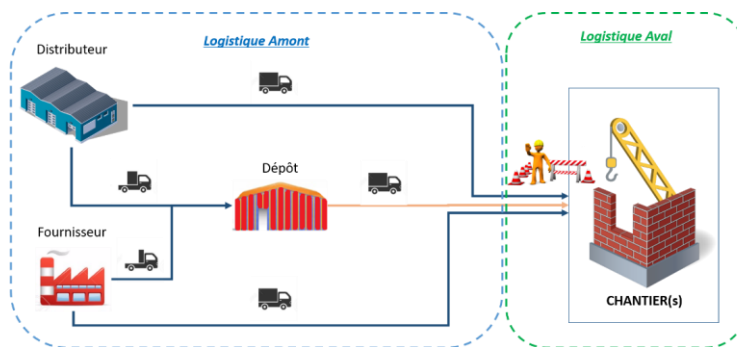

The site containers are indicative of our rigor and the maintenance of cleanliness of our sites, they:

- are organized and kept clean,
- Make it possible to isolate the defective equipment in a container dedicated to this purpose,
- Have no rooftop storage,
- Must have permanent slings in good condition,
- Have a water extinguisher + additive,
- Are ventilated (top and bottom grids) when storing chemicals (excluding flammable chemicals to be stored on Retention Pallet Trays – BPR)
- Do not contain auxiliary heaters.



The storage areas are delimited and identified and allow the movement of personnel in complete safety. The use of storage racks, storage baskets, big bags and handling assistance systems are also part of our standards.

Material management (formwork, machinery, work equipment, etc.)

One of the objectives of the prevention approach is to guarantee users access to equipment that complies with applicable regulations, standards and specific requirements. Verification of these aspects is all the more important as the equipment presents high risks during use.

A list of so-called "sensitive" equipment is drawn up according to equipment requiring technical inspections, special qualifications, having regulatory specificities and presenting risks in use. These are the materials:

- requiring an adequacy examination,
- requiring periodic visits,
- requiring major assembly operations,
- whose training in use is mandatory for safety,
- whose standardization contributes to the safety and productivity of construction sites.

The works managers, the methods department or the equipment department of the project ensure the proper management of the equipment, whether owned or rented, through specific checks established for each family of sensitive equipment and specifying the periodicity of the checks to be carried out.

Power tools expose you to recurring risks that need to be controlled. Thus, a referencing of equipment is defined in order to provide recent, safe, ergonomic equipment adapted to the different tasks to be carried out. Certain prohibited tools are the subject of a substitution guide.

Formalized preliminary training is provided either by the hierarchy, the distributors or by the Health and Safety Prevention Department.

In addition, the Project Manager issues a specific authorization to users of equipment identified as presenting significant risks.

Machines are also the subject of particular attention because of the risks linked in particular to the co-activity of pedestrian machines. Apart from the documents that must be present in the machines, Bouygues Travaux Publics equips its machines with safety devices according to the activities (pedestrian vehicle detection, reversing camera, etc.).

Verification and periodic control

Certain materials, devices and installations (gangway, lifting gear, pressure equipment, hoists, lifting devices, etc.) are subject to mandatory checks and controls. They are carried out by an accredited organization, or by a qualified person belonging or not to the company. The results of the checks and controls are recorded in the safety register and the attached reports. They can be consulted directly on the worksites.

Maintenance operations are recorded in a maintenance logbook under the responsibility of the Equipment Manager or equivalent function on the projects.

Power tools are maintained and kept in good working order:

- Verification before use by the user,

- Return to stock in perfect condition after use, otherwise, tools to be returned to Area Managers,
- Annual verification (depending on the type of machine and according to the user manual),
- Possibility of setting up a QR Code to ensure efficient monitoring of machines,
- Possibility of renting portable electric tools if necessary.



Vérification avant utilisation



QR Code d'identification

Defective tools are removed from workstations, as well as from the usual storage areas, in order to avoid any untimely reuse:

- Return the defective tool to the Area Manager,
- Store it "under lock and key" in a secure site cabinet/box,
- According to site procedures, affix a sticker or other visual means prohibiting use.

Personal protective equipment

Bouygues Travaux Publics applies a PPE policy on all worksites. Access to all of our sites is prohibited without the permanent wearing of general personal protective equipment:

- high safety shoes,
- helmet with chinstrap,
- high visibility clothing,
- Protective glasses,
- hearing protection,
- hand protection.

In addition to standard personal protective equipment, specific PPE is provided on projects based on a risk assessment corresponding to specific working conditions. A PPE guide lists the referenced PPE and their specifications.

2.13. Management of service providers and subcontractors

Subcontractors and service providers are integrated into the company's health and safety approach. The prevention policy is specified in the works contracts.

Support for subcontractors and service providers includes:

- compliance with Bouygues Travaux Publics standards (Fundamentals, directives, guidelines, etc.),
- joint inspection and validation of prevention documents (PPSPS type, H&S Plan, risk analyses, etc.) of the works concerned before they start,
- the health and safety launch with subcontractors, depending on the nature of the risks of the operations (high potential risks, etc.),
- the procedures for safety reception on the site,
- the follow-up of the company's intervention (coordination meetings, safety visits, self-checks, ¼ safety hour, participation in the life of the project, inspections, audits, etc.),
- the use of shared materials and equipment,
- reporting and analysis of events, including the associated corrective actions,
- the provision of a monthly report including at least the indicators relating to accidents and hours worked,
- participation in health and safety meetings organized on the project (safety quarter hours, communication campaigns, etc.).

2.14. Prevention of hardship

The objective of this approach is to reduce professional wear and tear and the arduous nature of jobs encountered on construction sites by allowing the use of appropriate and innovative organisations, equipment and materials. The risk factors taken into account at this stage are related to marked physical constraints (postures, manual handling, etc.), an aggressive physical environment (noise, vibrations, dust, extreme temperature, work in a hyperbaric environment, etc.), and work rhythms (work in successive shifts, night work, etc.).

Bouygues Travaux Publics has defined in its organization an ergonomics skills center dedicated to this approach and integrated within the Prevention Department. This provides training to the methods department to integrate ergonomic principles into operating methods.

Right from the design phase, the ergonomics division intervenes with the work and methods teams to ensure that the criteria of professional wear and hardship are taken into account for the production of specific equipment, operating or construction methods.

The ergonomics division also supports the teams in the field as the work is carried out to assess, improve and optimize work situations and organisations. A follow-up during the implementation is carried out to take into account the improvements identified by the operational staff to be made to the equipment, the operating methods or the kinematics of execution.

The Ergonomics division has decision-making support tools that allow you to find the most appropriate equipment in terms of ergonomics and safety, depending on the type of activity.

BYCN has set up a "Health Plan" in a multidisciplinary approach including H&S teams, human resources and occupational medicine. It is structured around 4 axes:

- ergonomics,
- life balance,
- health monitoring,
- work organization.

Objective and measurable indicators, deployed on worksites, are put in place to assess the relevance and effectiveness of actions.

2.15. Integration of technological evolution

The production teams work in collaboration with the methods and prevention teams by designing work situations through the use of new technologies:

- use and development of 3D digital models:
 - production of site execution plans,
 - use of Building Information Modeling (BIM) methods and its digital platform to share and communicate on site hazards,
 - apprehension of risk situations, anticipation to limit them from this digital modeling in virtual reality of the site,
 - visualization of access areas and storage needs, circulation of vehicles, construction machinery and pedestrians, delivery flows, etc.,
 - taking into account the risks from the preparation of the site and the possibility of putting in place adequate means of prevention,
 - collaborative sharing and enhancement of safety communication with realistic scenarios.
- technological watch on the evolution of exoskeletons and/or ergo skeletons in order to study them in order to be able to deploy them on certain workstations, with the aim of thus reducing the arduousness of the tasks,
- definition of specifications allowing the design of tools created specifically for the tasks of the business of the company,
- working collaboratively with innovative companies to develop new health and safety tools such as silica sensors, pedestrian detectors in the presence of machinery, high-performance safety grinders, zero-G arms for hand tools heavy or vibrating, etc.

2.16. Emergency management



On each project, a procedure for organizing and managing emergency situations is specifically established and implemented. The project's prevention manager plans and triggers emergency drills to respond to the various possible scenarios and train personnel in these potential emergency situations.

Emergency exercises are recorded and analyzed with the aim of continuously improving the effectiveness of the response provided by the project.

2.17. Event management

The projects record, analyze and process all reported health and safety events (injury accidents, near misses, dangerous situations and behaviours, material damage, occupational illnesses, etc.).

The different types of events can be:

- immediate oral notification for serious events,
- detailed written notification for all events,
- an administrative declaration according to the applicable local regulations,
- an investigation to analyze the root causes and define the appropriate actions,
- monitoring the implementation of these actions.

The investigation allows to:

- understand the circumstances of the event,
- collect the immediate actions triggered,
- identify the elements and causes that led to the event,
- describe the actions taken to prevent a similar event from happening again,
- share important information within the project and with the various entities/projects of Bouygues Travaux Publics when necessary.

The event management system has been digitized in its entirety in order to ensure complete processing and to optimize the analysis of accidents, thus allowing us to continuously improve our prevention measures.

2.18. Serious events and HiPo

Events are qualified as serious if they are:

- deadly accident,
- bodily injury resulting in irreversible consequences for the victim, either permanent disfigurement or permanent disability, regardless of the work stoppage,
- bodily injury requiring hospitalization for more than 48 calendar hours.

Other events are considered as so-called high potential events (HiPo) when they could potentially have led to a serious injury accident or a material accident with significant consequences.

Bouygues Travaux Publics pays particular attention to these various events at the highest management level of the company. A thorough root cause analysis is performed and specific

corrective actions are implemented. Feedback is shared with all the other projects based mainly on the causes identified and the corrective and preventive actions implemented.

FLASH ÉVÈNEMENT – PAT HIPO

Câble HTA endommagé durant une opération de terrassement

Description

Lors d'une opération de terrassement, le godet d'une pelle a heurté un fourreau de couleur rouge recouvert d'un grillage avertisseur sans sable.

L'opérateur de la pelle continue de travailler, ne se rendant pas compte de l'évènement. Plus tard, une personne extérieure au chantier informe le chauffeur de pelle et le chef d'équipe terrassement présent sur site qu'il n'y a plus d'électricité dans leur bâtiment.

Après vérification au sol, ils sentent une odeur de brûlé et comprennent que le câble HTA a été endommagé.

Conséquences

Câble ENEDIS HTA endommagé

Causes de l'évènement

Cause directe :

- Câble HTA heurté par le godet d'une pelle

Causes racines :

- Identification des réseaux incomplète (malgré la réalisation de sondages)
- Non respect de la procédure de terrassement à proximité d'un réseau HTA (0,50m)
- Signalisation du réseau enterré non conforme






Mesures de prévention

- Identifier les réseaux existants selon les bonnes pratiques.
- Prendre en compte la classe de précision du réseaux (A,B,C) pour réaliser le terrassement mécaniquement, puis dans la zone d'incertitude, utiliser les méthodes douces jusqu'à ce que l'ouvrage soit complètement dégagé.
- Se référer à la réglementation relative aux travaux à proximité des réseaux aériens et souterrains.




Évènement Cority #45261

Flash disponible sur Sharepoint P2S

Emetteur: P2S Pôle TP

N°001 – Janvier 2023

Périmètre : TPRF

2.19. Change management

Despite the efforts made in the planning of the work, it is recognized that, sometimes, it will be necessary to change the original method of carrying out certain activities, or that the context of the construction site leads to an emergency situation. Although the proposed or undergone change may seem minor, it is essential that it is properly managed to ensure that no unidentified security risks are introduced into the modified work.

The change management process takes into account the need for a more in-depth risk assessment and, if necessary, at site level, a modification of the risk assessment. Apart from securing and sometimes stopping activities, which must be done immediately in the event of an emergency, this process must be carried out in consultation with all the competent and qualified actors.

The change management process is characterized by the following steps:

- identification of the potential change,
 - issuance and review of a change request,
 - assessment of its level of impact on safety
 - risk assessment of the proposed change, if deemed necessary,
 - final review and change approval,
 - implementation of change.
- approach includes an area dedicated to the management of unforeseen events and in particular how to collectively manage unforeseen events in complete safety by:
- clarifying the conditions and means in the preparation of projects,

- detecting and managing the unexpected in safety,
- providing employees and management teams with efficient guides for managing the unexpected,
- capitalizing on feedback.

2.20. Conformity assessment

Health preservation

The working conditions on the project include the measures taken to prevent hardship at work. In order to ensure the reliability of the ergonomic principles adopted on the site, the ergonomics skills center carries out analyzes of the workstations under the supervision of the Project Prevention Manager.

Job analysis objectives are set for project prevention specialists. The results of these analyzes are summarized at the level of the Ergonomics Division and are the subject of specific actions. The content of the analyzes covers the following items:

- workspace,
- poses,
- repetitive gestures,
- manual handling,
- trips,
- vibes,
- working environment,
- incidents whose causes are related to ergonomics.

Safety inspections

Safety inspections are carried out by supervisors and health and safety prevention officers or the central team of the Health and Safety Prevention Department to check compliance with safety rules. In addition, the supervision, the control accompanied if possible by the companions also carry out safety visits.

Evaluation within the framework of the TOPSITE internal labeling

The construction sites are evaluated according to the criteria defined by the TOPSITE company's internal label. The assessments are carried out between 20 and 60% of progress on the site. This label identifies construction sites with remarkable behavior in the areas of health, safety, environment, quality, social, societal and customer satisfaction.

Internal and external audit

Each site or operational unit is audited according to the internal audit program established at company level. Audits are carried out by trained, competent and qualified personnel in auditing techniques.

External audits are also carried out on projects by the following parties:

- certification body,
- customer or representative.

2.21. Performance measurement and analysis

The company's H&S performance level is assessed through a formal occupational health and safety reporting process.

Bouygues Travaux Publics maintains real-time reporting of health and safety events via a digital reporting system. A monthly report by scope presents the indicators (vigilance index, frequency rate and severity rate, HiPo, near miss , etc.). It is also a tool for steering the actions to be implemented.

The projects report over time to the Health and Safety Prevention Department at least:

- events (including HiPo) and hours worked in accordance with BOUYGUES TRAVAUX PUBLICS definitions,
- alertness index,
- addiction controls,
- visits and checks by external bodies.

Performance analysis takes place at several levels within the company:

- at the level of the General Management of BOUYGUES TRAVAUX PUBLICS
 - during the review of the Health and Safety Approach led by the Operational Department. It provides strategic direction to the company. It also aims to carry out self-monitoring of the process,
 - during meetings of the Management Committee (CODIR). These periodic meetings are an opportunity to analyze the indicators, compare them to the objectives set, review the highlights and define actions if necessary.
- at the level of the Health and Safety Prevention Department
 - on the occasion of the monthly, half-yearly and annual reports.
- at project level
 - during internal project reviews. Each project organizes a review at regular intervals, with the aim of taking stock of health and safety issues, and defining prospects and ways of improvement.

2.22. Non-conformities

The potential sources of nonconformities are:

- deviations from applicable requirements;
 - legislation,
 - parent company standards,
 - contractual,
 - etc
- non-compliance with the Bouygues Travaux Publics HSMS provisions (policy, HSMS documentation, etc.) detected during audits and inspections,
- incidents, accidents or other adverse events.

The treatment of non-compliant situations and actions required following accidents is managed by our event management process. For the other non-conformities observed, the non-conformity management process is applied.

It includes the following steps:

- detection and identification of non-compliance,
- analysis of the seriousness, the extent of the non-conformity,
- root cause analysis (for significant non-conformities),
- the methods for dealing with the non-conformity (suspension of the activity/subject, return to compliance with the requirements, modification of the requirements, acceptance as is),
- definition of corrective (and potentially) preventive actions.

2.23. Equity Management

Action management covers all the actions identified in all the processes of the Health and Safety Management System, in particular:

- suggestions from employees,
- the day before the requirements,
- comments from customers and interested parties,
- risk assessment,
- inspections and audits,
- events and non-conformities,
- the various H&S journals,
- etc

The Project Prevention Manager and/or the Health and Safety Prevention Department monitors and updates an action monitoring register, which includes all these elements, as these actions progress.

The monitoring of the effectiveness of actions is also managed via this register.

2.24. Continuous improvement

Bouygues Travaux Publics pursues a continuous improvement process, via:

- performance measures,
- data analysis,
- improvement actions,
- the collection of continuous feedback from experience at the end of the project.

This feedback is centralized by a team dedicated to knowledge management in the company.

This continuous improvement is assessed by indicators and dashboards set up by the Health and Safety Prevention Department.

This continuous improvement occurs thanks to the result of all activities described in the Health and Safety Management System, in particular, the following:

- achievement of associated objectives and indicators, where applicable,
- participation and consultation of employees,
- monitoring of applicable requirements,
- visits by customers and inspection bodies and other interested parties,
- audits and inspections (safety visit, visit to various safety committees, etc.),
- management of non-conformities and health and safety events (including root cause analyses),
- the management of corrective & preventive actions,
- taking into account feedback and best practices,
- process reviews, health and safety approach, management review.

3. BYTP Health & Safety Basics



STANDARD BYTP HEALTH & SAFETY BASICS

MAJOR RISK


Lifting


Vehicles / pedestrian interaction


Fall from height


Stability


Dangerous energy sources

LIFE-SAVING RULES

- I **NEVER** go beneath a load while it is being raised or lowered
- I **NEVER** stand between a load and a fixed obstacle or the edge of a drop
- I **ALWAYS** ensure that the load being lifted is a single unit or placed in a 5-sided cage
- I **ALWAYS** follow the lifting plan
- I **NEVER** work at a height without collective protective equipment or a harness
- I **NEVER** enter no-go zones above or below a working at height area
- I **NEVER** leave openings leading to drops unprotected and unmarked
- I **ALWAYS** respect the pedestrians/vehicles routes
- I **NEVER** go into the work zone of moving plant or vehicles without signaling to the operator and receiving confirmation by eye contact
- I **ALWAYS** use machinery on stable and/or properly prepared ground
- I **ALWAYS** use equipment and materials on a stable and solid base
- I **NEVER** work on a system without having been trained and authorised to do so
- I isolate, lock out, and **ALWAYS** ensure that there is no residual energy before starting any work


STOP


Driving


Personal protective equipment


Drugs and alcohol


Daily briefing


Portable tools


Manual handling - Ergonomics


Hazard analysis and hazardous substances


Civil works specific activities

Basics requirements also apply for each of our Health & Safety basics

BOUYGUES TRAVAUX PUBLICS

BOUYGUES TRAVAUX PUBLICS

Health and safety management system | BYTP-INF-H&S-2018-vB | 2/26/2026
Page 26 of 27

Bouygues Travaux Publics

Service de Prévention Santé et Sécurité

 preventionsecurite@bouyguestp.com

BOUYGUES
TRAVAUX PUBLICS