

Health & Safety

Standard Site installations



Reference

Company	Department	Document Type	N°	Version	Langue
BYTP	H&S	REF	2216	B	EN

Version	Date	Written by	Checked by	Approved	Reason for modification
A	01-11-2023	F.MARTIN	I.LELIEVRE	L.KNOLL	First issue
B	02-12-2025	F.MARTIN	A.JANSSENS	L.KNOLL	Modification following BYCN Guidelines

Version B Update Details:
Addition of a recommendation to visually identify prohibited lifting zones on the Site Installation Plan.
Update of section 4, now titled “Site’s power supply network”, to include BYCN’s electrical safety requirements for our installations.

The worksite installation standards presented in this document aim to provide a practical guide to define the means to be deployed to effectively manage the project site.
This document is completed by the elements presented in the **Standard vehicles / pedestrian interaction [BYTP-H&S-REF-2212]** for the organization of vehicle-pedestrian interfaces.

Table of contents

1. Site facilities	7. Fences
2. Cleanliness of site facilities	8. Lighting
3. Hygiene and health	9. Parking areas and access security
4. Site’s power supply network	10. Circulation aisles via storage areas
5. Fire prevention	11 . Cleanliness of public traffic areas
6. Access and find your way around the site	12. Site installation plan



1. Site facilities

Canteen:

- Equipped with at least a refrigerator, a microwave and/or a hob
- Air conditioning/heating canteens and offices.

Changing rooms:

- 1.25 m2 / worker
- Mixed staff = separate facilities
- Wardrobe separating work clothes and personal clothes
- Permanent ventilation during working hours
- Drying cabinet with air extraction



Sanitary:

- Sink (drinking water at adjustable temperature): 1 for 10 workers
- Permanent ventilation in the sanitary facilities
- Urinal with lavatory: 1 for 20 workers
- Provide women's toilets if necessary

For operators working in underground spaces:

Make available to employees who regularly work in these significantly humid and dirty areas, individual or collective devices for drying work clothes with discharge of stale air outside the buildings.

Separate premises:

When changing rooms and sinks are installed in separated rooms, traffic must be able to take place without crossing the worksite or storage rooms and without going outside.

Preferably locate them as close as possible to construction sites and physically separate them from storage or delivery areas.

Ensure that bungalow-type constructions have the collective protections allowing safe assembly and dismantling.

2. Cleanliness of site facilities

- Regular cleaning of offices and premises (Sanitaries: 1/ day)
- Systematic installation of boot washers and "scraper" grids
- Establishment of smoking areas and ashtrays outside
- Clean the areas used daily, as often as necessary and favorising the use of a vacuum cleaner
- Clean periodically, and at least weekly, household appliances used for catering (refrigerator, microwave, cooking oven, etc.)

3. Hygiene and health

- Before lunch or leaving the site, it is necessary to wash your hands
- Provision of drinking water to workers (minimum 3L/day/worker)
- Provide reserved and independent facilities to accommodate female staff (sanitary, changing rooms, etc.) as specified in section 1 of this document
- For linear underground worksites, provide lavatories at a distance of around 100m from the main workstations (tunnelling machine, following train, occasional attack front, installation of railway equipment, etc.), and ensure regular cleaning



4. Site's power supply network

- Site power supply network is subject to a design carried out by a competent person and formalized on a one-line diagram
- An initial electrical verification of the installations is mandatory and must be recorded in the safety register
- An annual check of installations is mandatory and should be recorded in the Safety Log, or more frequently depending on local regulations
- Redo an electrical verification each time the electrical installation is modified
- Electrical cabinets and boxes are equipped with padlocks and remain permanently locked
- The connections of plugs/cables are possible without opening the doors. There is no access to live parts.
- The connections of equipment to this network is be made exclusively via plugs. Plugs are protected by a residual current circuit breaker with a sensitivity of 30 mA.
- Cables located at a height of less than 3 meters or those over which vehicles are likely to drive are sheathed and preferably buried to protect them against crushing.

5. Fire prevention

- 1 fire extinguisher per closed bungalow (minimum 1 for 200m²)
- An annual fire extinguisher check is mandatory and must be recorded in the safety register
- Near electrical cabinets = CO2 fire extinguisher



No powder fire extinguisher in the premises


6L or 9L water + additif

6. Access and find your way around the site

Set up indication signs around the work site to facilitate the identification of access points.

In order to facilitate location on the site and emergency instructions, set up on each structure (pier, abutment, etc.) a display recalling the most important information:

- Emergency Muster points
- Emergency Call contacts list
- Zoning

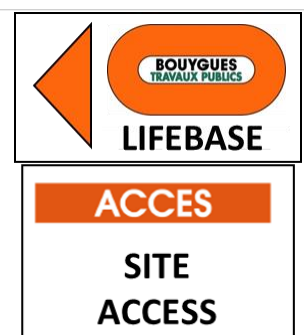


7. Fences

The site must be fenced with impassable elements.

For linear construction sites, the construction site must be equipped with fences on active working areas (except when required differently by the Authorities/Client).

Prefer plastic studs or if possible plates sealed to the ground oriented away from the pedestrian traffic area (facilitates handling)

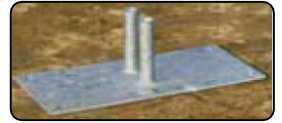

Position the studs perpendicular to the fence

Maintain the fences together with anti-vandalism collars



In the case of an opaque fence, it is necessary to brace it to prevent tipping.

This bracing is dimensioned by the subcontractor or the Methods Department.

8. Lighting

Traffic lighting at the machine-pedestrian interface is dealt with in the standard document BYTP-H&S-REF-2212 [Vehicles / pedestrian interaction].

In general, it is recommended to use LED lights with the following advantages:

- Better visibility for personnel, especially to highlight obstacles for crane operators
- Low power consumption and increased lifespan thus providing a low environmental impact
- Ease of implementation
- Absence of heat radiation
- Insensitivity to shocks

For work at night or in poorly lit areas, it is recommended to use site lighting balloons:

- 360° illumination
- Glare-free light
- Simple and quick to set up



9. Parking areas and access security

Vehicles must park in the direction of departure

PARK IN REVERSE



Shaping a Better Life



When necessary, wheel stops on the parking spaces can be put in place.



In general, it is recommended to secure access and equipment against collisions with vehicles and machinery.



Areas such as car parks, parking areas and storage areas can be marked with traffic studs.

This makes it possible to delimit the spaces permanently and to support the passage of vehicles without damaging the tires due to their low height.



10. Circulation ways via storage areas

Defining storage areas during site installation allows:

- Save time unloading
- A good image of the site – Industrial approach
- Flow management (Storage – pedestrian traffic)
- An alternative to signaling paint for pedestrian traffic areas



11. Cleanliness of public traffic areas

Public roads must be kept clean at all times.

If necessary :

- Have sweepers pass regularly (provide a service provider at the start of the project)
- Set up a washing station




12. Site Installation Plan

Systematically carried out by the Methods department, it is:

- updated as many times as necessary
- introduced to all staff

Must appear:

- Office and site access
- The storage area(s)
- Crane positions
- Muster area
- Management of pedestrian/vehicle interfaces

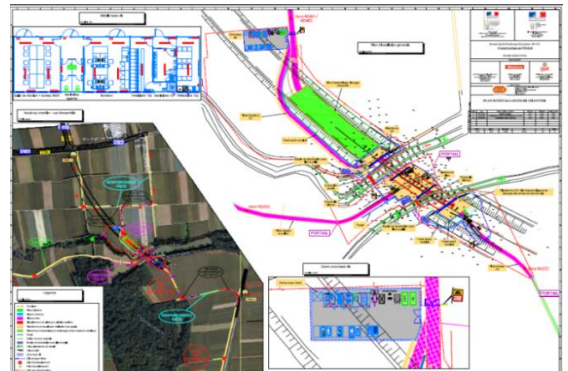

It is recommended to specify the prohibited areas for lifting operations.

The Site Installation Plan must be displayed in its latest available version, presented at reception and known to all.

Interactive Site Installation Plan:

- Site Installation Plan printed on magnetic media and white board
- Simple, fast and concrete visual of coactivities in space and time
- Playful and participative support to help organize the workspace
- Practical tools for training in the risks associated with co-activity.

Provide several magnets, representing the elements with variable position: concrete mixers, mobile cranes, skips, etc.

