

MEMO

Competency assurance

Competency of employees

For the duration of the Project, we mobilize a competent and skilled work force, including craftsmen, foremen, supervisors and support personnel.

The expected level of competence and awareness in HSE of this workforce is achieved through the development and administration of adequate training by consortium Human Resources department.

The type and level of training to be provided are appropriate to the job function and the associated risks and take into account levels of responsibility, ability, language skills and literacy.

Training plans are developed and maintained on each project worksite and include:

- Project and/or third-party resources required to implement the plan
- A listing and description of available HSE training modules, including a description of which modules are required or recommended for specified groups
- A structured process to periodically verify HSE training effectiveness
- A training and familiarization program to verify that Project personnel have the knowledge and skills required to effectively utilize the newly developed safe work practices
- Specific training on environmental topics is included in the plan

Each worksite location is responsible for maintaining records for all consortium employees and for notifying individuals and organizing refresher training as necessary.

Each Subcontractor will implement similar process and provide each worksite with evidence of trainings delivered to their personnel as part of the “on boarding” process.

Worksites shall assess the effectiveness of their HSE training programs through one or a combination of the following methods:

- Personnel HSE awareness tests
- Number and significance of unsafe acts or conditions reported by the workforce
- Overall HSE performance of the Project

The results of these methods are recorded and continuous improvement ways are developed.

Training records are maintained to ensure that each employee has attended the concerned training and to anticipate the refreshing sessions.



Trainings requirements

All personnel who are required to perform work on the worksite shall comply with the applicable training matrix associated with their work location, which can be outlined as follows;

- All personnel shall be in possession of a valid medical fitness certificate (copy to be handed to the facility medical staff, if any).
- A sufficient number of first aiders (1 out of 20 workers) and fire fighters should be present on the work location to cover all the sites / work teams
- Additional training requirements may apply;
 - depending on the job / position (work at height, electrical awareness, rescue team, lifting team, crane operator, emergency situations, chemical management, waste management, water management, etc)
 - according to local regulations

The training matrix for each work location will be available on site, and all personnel will be vetted against the matrix as part of their Induction process.

Personnel HSE induction

Each Worksite will provide all personnel with a comprehensive HSE Induction, at the first time, without exception regardless of position or experience.

Typical information to be presented at the HSE Induction is as follows but not limited to:

- HSE Policy, Safety Plan and organization, including nominated representatives
- Brief description of the scope of work
- Safety culture and leadership
- Project HSE Objectives
- Local HSE rules and regulations
- Life Saving rules
- Specific Site information (walkways, traffic routes, use of mobile phones, restricted areas, security rules, etc.)
- HSE basics & site-specific risks and mitigation measures
- Drug and Alcohol Policy
- Stop Work Authority
- PTW System / lifting plan / LOTO Procedure, whenever applicable
- Personal Protective Equipment
- Environmental concerned & Waste management
- Information related to site accommodation (canteen, toilets, restrooms, smoking areas, etc.)
- Emergency Alarms and Procedures / Muster Point location / First aid arrangements
- Site notice boards, site safety signage
- Incident / Accident reporting procedures
- Recognition program and disciplinary policy
- Current Safety Campaigns
- Any requirements coming from surroundings industries / projects and affecting the project sites
- Others (according to the context)



BUILDING FOR LIFE

HSSE induction is delivered in a language, appropriate for the understanding of the participants.

HSSE induction is supported by a brief questionnaire to ensure the information has been absorbed by participants.

A personal site access card is delivered once it is confirmed that HSE induction has been absorbed by the attendee. Specific arrangements are made to identify newcomers or safety critical workers to allow experienced workers to keep a watch over them.

The induction package for visitors could be less detailed than the one delivered to the personnel working at the active work site. All visitors will always be accompanied if attending the active areas of the worksite,

Records of all HSE inductions are kept at the project level.

Induction training will be regularly updated to reflect current key activities and risks encountered during the construction of the project.

Daily briefings & ToolBox Talks

Daily workforce briefings should take place to discuss in each team about the work to be performed, presence of simultaneous operations, associated risks and HSE measures to be implemented. Transmission of relevant HSE information will be ensured between the different shifts as part of this briefing.

In addition to the daily briefings, all Contractors working on site are expected to carry out regular toolbox talks proactively with their work force to provide 'refresher awareness' on topics that are relevant to their current / future work activities or to a specific topic of the site.

Example of topics are: Life-saving rules / golden rules, major risk focus (lifting activities, work at height, vehicles - pedestrian interaction, etc.), Safe methodology for working alongside operating railway freight tracks / emergency procedures / medical arrangements, safety flash following significant event, security topics, waste management, dust, noise monitoring, etc.

Records of attendance and the information communicated will be maintained.


Others communication and HSE specific events

Throughout the duration of the project, a regular communication will be ensured with the workforce, providing information about the progress of the construction works, milestones achieved, upcoming challenges, safety / environmental incidents etc.

This information will be shared through different mediums including newsletters, team briefs, poster campaigns and digital media.



BUILDING FOR LIFE

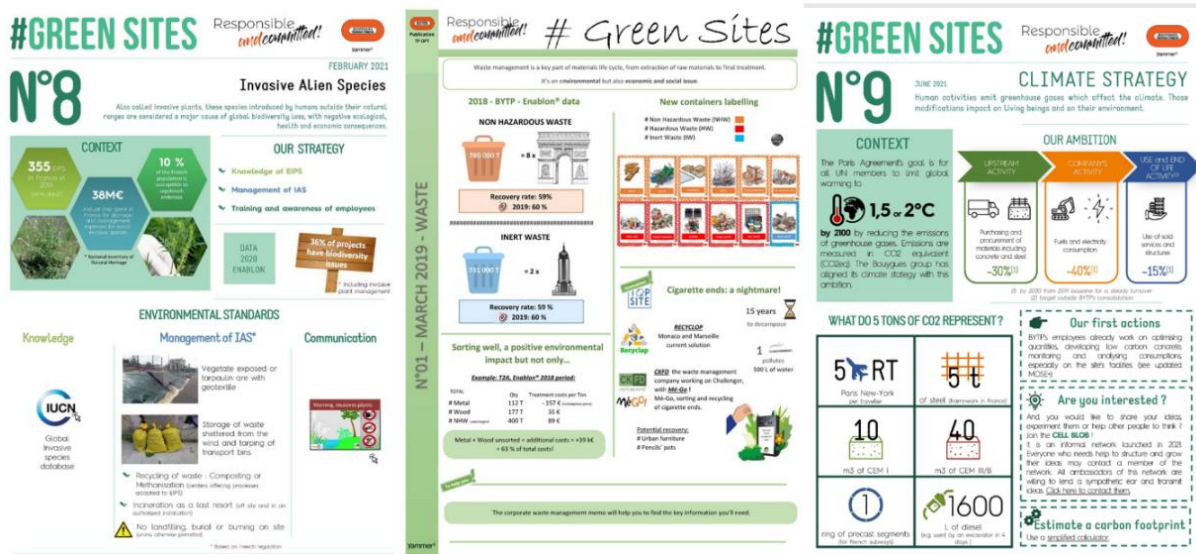

Notice boards will also be installed to provide important HSE information (project target, safety flash, site rules, HSE initiatives, etc.)

FLASH EVENT – High Potential Near Miss

HV cable damaged during an earthmoving activities

Description of incident

During an earthmoving operation, the excavator initiates a trench excavation and notices a variation in the material. At that time, the excavator assistant notices a black cable. After a thorough examination of the ground with the aid of a wooden rake handle, they confirmed the presence of a high-voltage (HV) cable.

Consequences

No personal injury
Damaged HV cable
Task stopped

Causes of the event

Direct cause :

- HV cable damaged during earthworks

Root causes :

- No network staking
- Incomplete network plan
- Absence of warning mesh
- Non-compliant network burial depth



Life Saving Rules - Prevention measures

I NEVER WORK ON A SYSTEM WITHOUT HAVING BEEN TRAINED AND AUTHORISED TO DO SO

Always request the staking/markings of existing networks.
Always have the approval of the activity supervisor before starting an excavation.
Always use gentle excavation methods when approaching a utility network.
Always hold a certificate of Authorization for Intervention in the Vicinity of Networks for designers, supervisors, and operators.

Cority event # 52504
Flash available on CWD H&S Sharepoint

Issued by: BYTP H&S
N°031 – December 2023
Perimeter : GTF

All workers will also take part in consortium safety day event in addition to any safety stand down organized during the course of the project.



BUILDING FOR LIFE

Safety culture and leadership

Tenderer will implement his "Safety Culture" program to continue promoting cultural and behavioural change with the aim of improving safety behaviours at all levels of the organisation and during all phases of the project execution.

3 major axes have been defined:

- Leadership
- Management of unforeseen events
- Focus on high-risk activities

Please refer to the document E-4

Internal Audits

To ensure continuous compliance with HSE standards and the effectiveness of HSE and competency programs, internal audits will be conducted regularly throughout the duration of the project. These audits are a critical part of our safety management system and serve to verify that all procedures and training initiatives are being properly implemented and maintained at each worksite.

The objectives of the internal audits include:

- **Assessing Compliance:** Verify adherence to established HSE procedures, training requirements, and HSE policies across all levels of the workforce.
- **Identifying Gaps:** Identify any gaps in training, safety practices, or procedural compliance that could lead to increased risk or non-compliance with regulatory standards.
- **Improving Processes:** Provide actionable feedback and recommendations for continuous improvement of HSE and competency programs based on audit findings.
- **Ensuring Record Accuracy:** Check the accuracy and completeness of training records, HSE reports, and other documentation relevant to workforce competency and HSE practices.

Each audit will be documented, with findings communicated to relevant stakeholders, including site management and consortium leaders. Follow-up actions will be tracked to ensure timely resolution of identified issues. Audits will be scheduled based on project phase, risk level, and past audit performance.

Site Visits

Regular site visits dedicated to health, safety and environnement are performed by the projects management, which can involve worker(s), are part of our approach to maintaining high HSE standards and ensuring workforce competency. These visits provide an opportunity to directly observe worksite conditions, verify compliance with HSE protocols, and engage with personnel to reinforce the safety culture.

Key elements of site visits include:

- **Observation of Work Practices:** Direct observation of day-to-day work practices to ensure they align with established safety / environmental protocols and that personnel are applying their training effectively in real-world scenarios.



BUILDING FOR LIFE

- **Engagement with Personnel:** Interaction with workers to discuss HSE concerns, gather feedback on training effectiveness, and identify any additional support or resources needed.
- **Inspection of Equipment and Facilities:** Assessment of the condition and use of safety equipment, tools, and facilities to ensure they are fit for purpose and comply with safety standards.
- **Review of HSE Documentation:** Verification that all required HSE documentation, including permits, training records, and inspection logs, is up-to-date and accurately maintained.
- **Feedback and Follow-up:** Immediate feedback is provided to site management and workers during the visit, with a formal report generated post-visit detailing observations, commendations, and areas for improvement. Any critical issues identified will trigger immediate corrective actions.

These site visits not only reinforce compliance but also support a proactive approach to risk management and continuous improvement in HSE and workforce competency.



BUILDING FOR LIFE