

HS2 – Sector C1 Ground Investigation Site Induction and South Portal Earth Works

Good Morning....

Welcome to working on ALIGN's section of HS2, the Government's flagship transport infrastructure project.

House keeping

C1 ■ ALIGN Coronavirus

Preventing the spread of Coronavirus

- **Catch it Bin it Kill it:** cover your mouth and nose with a tissue or your sleeve (not your hands) when you cough or sneeze - put used tissues in the bin straight away.
- **Hand Hygiene:** wash your hands with soap and water often – use hand sanitiser gel if soap and water are not available. Hand sanitising gel is available in all offices.
- **Desk Hygiene:** clean and disinfect frequently touched objects and surfaces. This is particularly important where there is frequent swapping of desks (hot desking) – disinfectant surface wipes are available in all offices.
- **General Hygiene:** try to avoid close contact with people who are unwell. Do not touch your eyes, nose or mouth if your hands are not clean.



If you are worried about symptoms, please call NHS 111.
Do not go directly to your GP or other healthcare environments.
Do not visit your site nurse or medical centre.

www.gov.uk/guidance/coronavirus

Stop it Spreading!



C1 ■ ALIGN Coronavirus

STOP!

If you have any of these symptoms



Cough



Fever



Shortness of
breath

or

think you may have been in contact with
someone with Coronavirus

or

have arrived back from one of the countries
or specified areas affected by Coronavirus

**Please do not enter the Medical Centre
CALL NHS 111 for advice**

www.gov.uk/guidance/coronavirus

Stop it Spreading!



Project Description

ALIGN is a Joint Venture made up of Bouygues TP, Sir Robert McAlpine and VolkerFitzpatrick. It is responsible for delivering the £1.3bn Chilterns Tunnels and Colne Valley Viaduct contract as part of a section of the new High Speed Rail link between London and Birmingham.

ALIGN JV awarded Stage 1 Scheme Design contract for
Lot C1 – Colne Valley Viaduct and Chiltern Tunnels

PROJECT INTRODUCTION

5


ALIGN

22 kilometres


Colne Valley Viaduct – 3.4 Km

Chiltern Tunnels – 15.8 Km Twin Bore Tunnel

Chilterns Area of Outstanding Natural Beauty

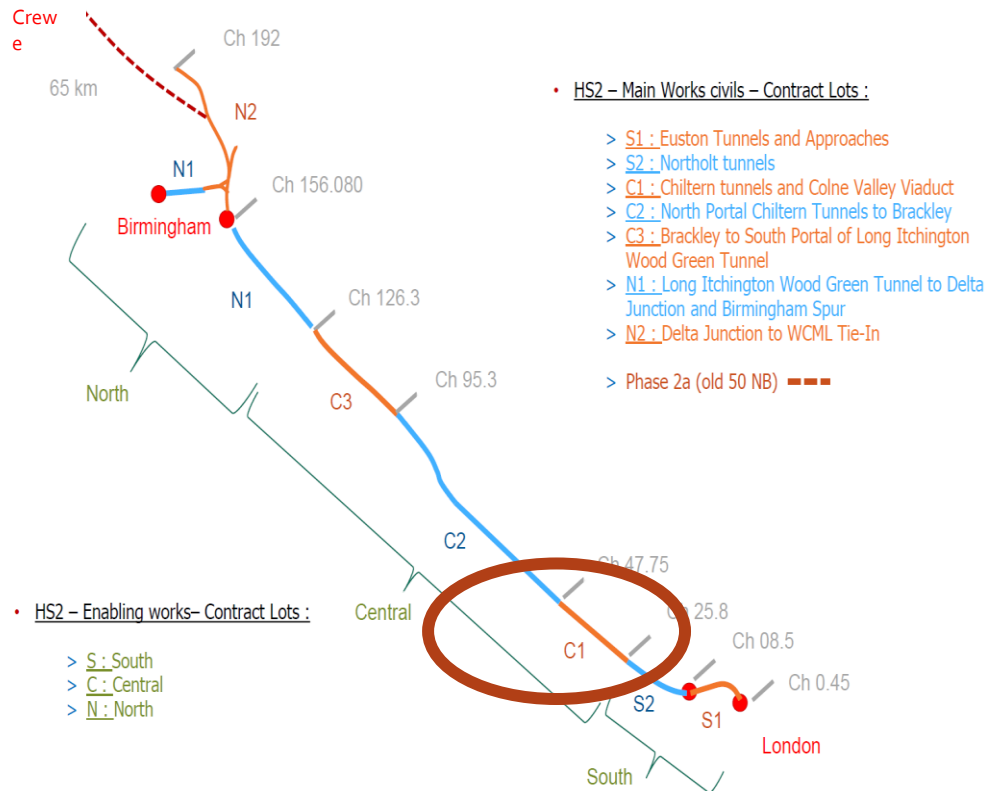

PROJECT INTRODUCTION

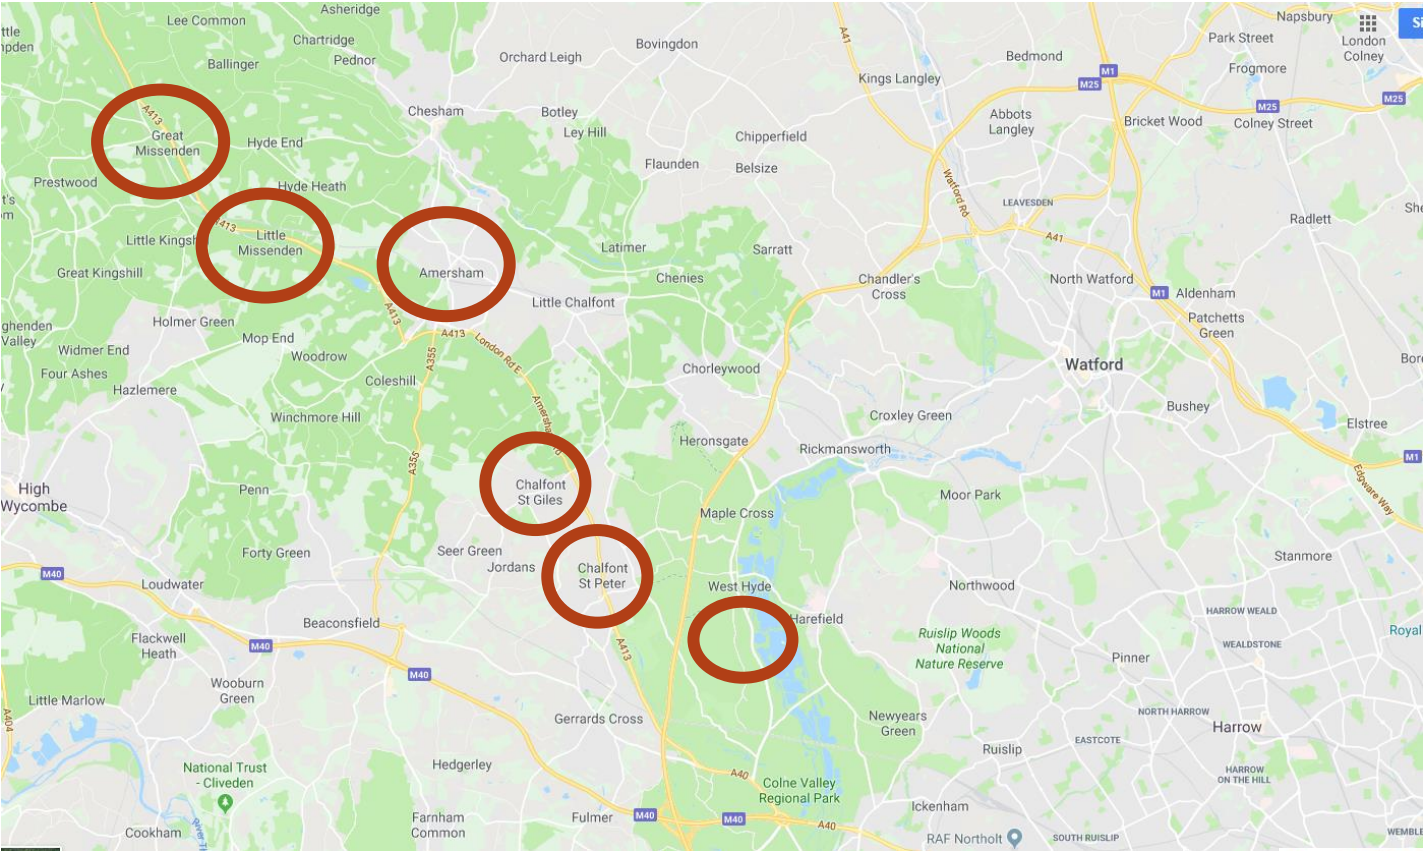

HEALTH AND SAFETY – ALIGN COMMITMENT TO YOU

- Safety is at the heart of everything we do - safety is our first consideration. Everyone working on the project has a right to work in a safe environment.
- Our aim is to develop a culture where we make safe decisions and act to mitigate risks wherever and whenever they occur.
- You can help by using our Site Safety Observation Reporting cards – if you see something unsafe or have an idea to improve safety please complete an observation card and put it in the box.



ALIGN expects and requires its workforce to be competent at what they do.

As a minimum, we require you to hold a CSCS/CPCS or equivalent card appropriate to your trade or machine you use.

This shows us that you have at least a basic understanding of construction health and safety, with competence being confirmed by your employer and verified by us prior to this induction.



HEALTH AND SAFETY – YOUR COMMITMENT TO ALIGN

9

In accordance with the HEALTH and SAFETY AT WORK ACT 1974, it is your responsibility to:

- Work in a safe manner.
- Not endanger yourself or others by either your ACTS or your OMISSIONS.
- Co-operate with all initiatives to promote health and safety.
- Take personal ownership of your individual safety.
- Follow your safe system of work if provided.



Intervention

Everyone has the right to challenge, stop work or intervene if activities don't look or feel safe.

If you consider the safe method of work, which has been set up for the task you have been instructed to carry out; is not practical or is unsafe you must stop work, make sure the area is safe, and contact your supervisor immediately.

You have the total support of ALIGN if you stop work due to a safety issue, and raise the problem with your supervisor.



HEALTH AND SAFETY – ALIGN 12 SAFETY BASICS/VALUES

10



2-way Pre-Task Briefing
at the Point of Work For
Everyone



All Tasks subject to a
Risk Assessment at the
Point of Work



Everyone has the right to
Stop work activities if they
don't look or feel safe



No one will work in any
location whilst under the
influence of alcohol or
drugs of any kind



Work on energised
systems is forbidden



High quality appropriate
tools will be made
available for all
activities



Appropriate High
Quality PPE will be
available to everyone in
line with activity risk
assessment




Manual Handling will be
the last resort on Align
JV worksites



Temporary Structures,
equipment and plant will
be designed and installed
in strict accordance with
technical guidance and
designs



The interface between
People and Plant will be
avoided and high quality
walkways will be used in
all locations



All work at height will be
carried out within
collective fall protection
areas. Ladders and
stepladders will not be
accepted as working
platforms



Working platforms will be
fully protected.
Tools and equipment used
at height will be tethered
at all times

- Don't take chances, tell the Site Manager or Supervisor if you have any medical limitations. It is your responsibility to report any medical limitations you have to the Site Manager regarding your ability to carry out your duties whether the condition is short term i.e. having to take a course of prescribed medicines or long term i.e. epileptic fits, hard of hearing, anaphylactic etc.
- All personnel will be subject to a Pre-commencement Health Questionnaire.
- All Safety Critical personnel will have to present evidence of passing a Safety Critical Medical.



Pre-Task Briefing

There will be a 2-way Pre - Task Briefing and a physical warm-up at the Point of Work

ALIGN operate a strict Drugs and Alcohol Policy with which you must comply.

- You shall never report for work with any trace of drugs or alcohol in your system or have in your possession, whilst at work, alcohol or controlled drugs.
- All site personnel and visitors may be subject to D&A screening (urine sample and breathalyser) both random and for cause.
- If you return a positive result then you will not be allowed to work on-site.



- Know who your First Aiders are and where your First Aid point is.
- All ALIGN/Contractors site vehicles are equipped with first aid kits.
- All sites contain first aid kits, eye wash stations.
- All ALIGN/Contractors first aiders can be identified by a sticker on their hard hats and upon First Aid Posters
- Report all accidents, however trivial they first appear.
- An Accident Book is maintained by the Site Manager and an entry must be created for all incidents on the day of the incident.
- AEDs (Defibs) are situated in the Office and in the Works Manager's Vehicle.





Mental Health First Aiders



PETER DAY
07734 335908



SUNNA HUSSAIN
07812 745415



JUSTIN OTLEY
07872 814894



NATASHA CHAPLIN
07768 007344

There are plenty of different types of support out there, and a Mental Health First Aider can help you access them.

Mental Health First Aiders are a point of contact if you, or someone you are concerned about, are experiencing a mental health issue or emotional distress.

They are not therapists or psychiatrists but they can give you initial support and signpost you to appropriate help if required.

If you have any question about Mental Health First Aid please contact one of the First Aiders above.




ALIGN have made a commitment to fight against all forms of Modern Slavery but we need your help. Signs of potential abuse may include:

- Individuals who do not have access to their own identity documents.
- Money being taken at source by a third party to pay for food, rent, debts etc..
- If a worker looks malnourished, unkempt, or appears withdrawn.
- If the person is withdrawn or appears frightened or is unable to answer questions directed at them.

If you think you work with or employ someone who may be a victim of Modern Slavery or forced labour you can call a helpline on 0800 0121 700 and talk through your concerns or visit modernslavery.co.uk.

NEAREST HOSPITALS/EMERGENCY DENTIST

16

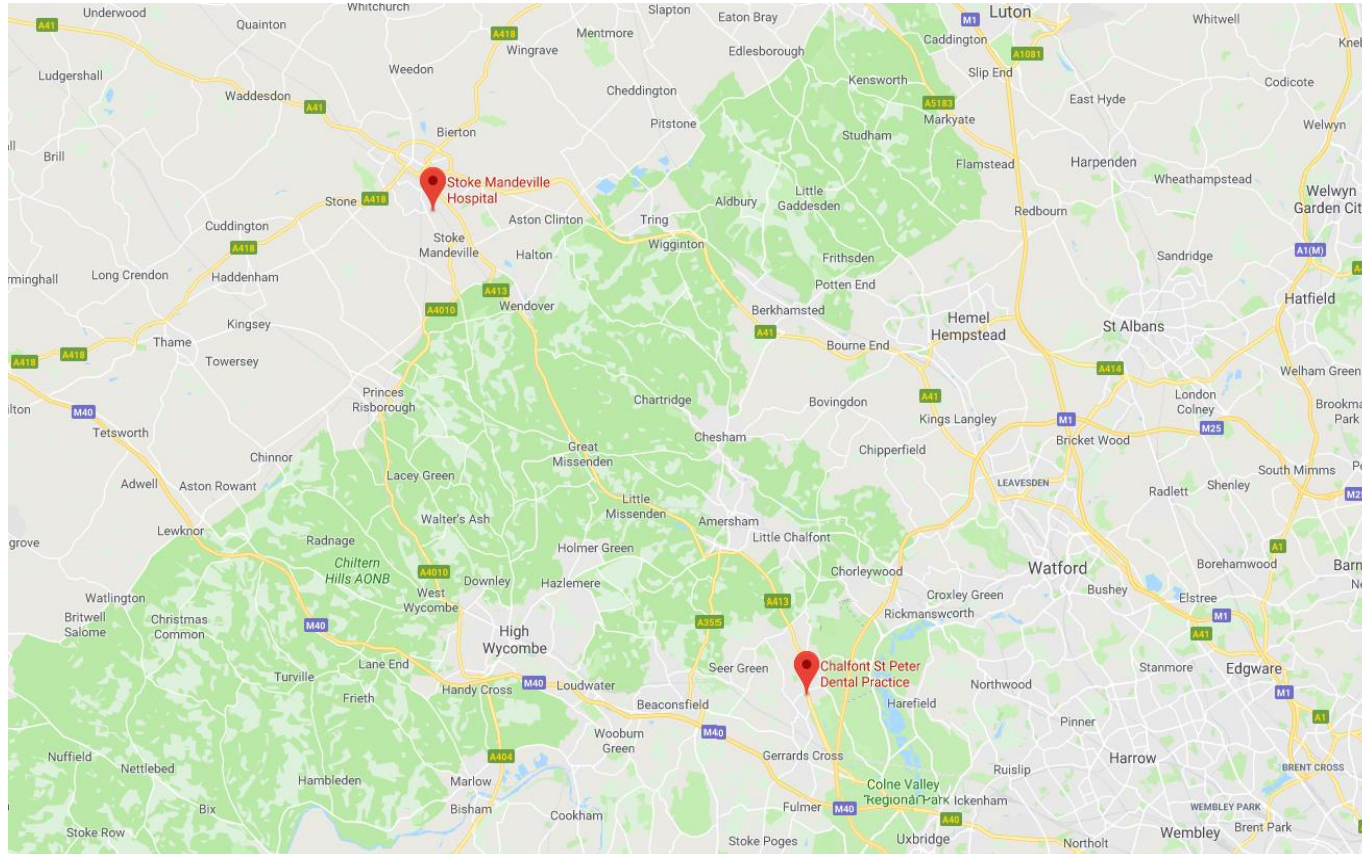

Stoke Mandeville Hospital-24 Hr A&E

Mandeville Road
Aylesbury
HP21 8AL

Tel: 01296 315000

Hillingdon Hospital-24 Hr A&E

Pield Heath Rd
Uxbridge
Tel: 01895 238383

Chalfont St Peter Dental Practice

15 Lower Rd
Chalfont St Peter
Gerrards Cross
SL9 9AL

Tel: 01753 888000

NEAREST PHARMACY

17



Local Pharmacy:
Epilepsy Society Pharmacy
Chesham Lane
Chalfont St Peter
SL9 0RJ

Opening Hours:
Mon -Tue 08:00 - 17:00
Wed -Thurs 09:00 - 17:00

Contact:
Telephone: 01494 601352
Email: pharmacy@epilepsysociety.org.uk



- Second biggest killer after asbestos to the construction industry.
- Can cause lung cancer and thought to be responsible for over 500 construction deaths per year.
- Silica is a natural substance found in varying amounts in most rocks, sand and clay. Silica is also a major constituent of construction materials such as bricks, tiles, concrete and mortar.
- Respirable crystalline silica is generated from drilling, cutting, grinding and polishing.
- Protection afforded by suppression and RPE (Minimum FFP3 JSP Press to Check).



PPE

Appropriate High Quality PPE will be available to everyone in line with activity risk assessment and must be worn



- Asbestos is no longer allowed to be used in the UK and we are not dealing with buildings.
- However, it is still possible that asbestos containing materials could be present but have not yet been identified (Buried in the ground or Fly tipped- see opposite examples)
- Therefore, if you discover any unknown/suspect materials, you should STOP work, seal the area off and report the findings to your supervisor immediately.



- Leptospirosis or Weil's Disease is spread in the urine of infected animals – most commonly rats, mice, cows, pigs and dogs.
- You can catch it if soil or freshwater (such as from a river, canal or lake) containing infected urine if it gets in your mouth, eyes or a cut.
- Always wash your hands before eating, drinking or smoking.
- Dispose of unused food in the correct bin to discourage vermin.
- Tell a GP if you might have been exposed to infected urine and you have flu like symptoms.



All works are to be undertaken between:

0700 to 1900 Monday - Friday

0800 to 1300 Saturday

Unless agreed in advance with ALIGN Management

- You are not permitted to work more than 12 hours on-site per shift.
- Your shift, including travel to / from your place of rest, must be no more than 14 hours 'door to door'.

Fire

- Raise alarm – verbally SHOUT / ring or sound the fire alarm bells.
- If trained to, use fire extinguishers then assess the conditions before tackling.

Q. Do you know which fire extinguisher to use?If not, do not attempt to use it!!!



- If necessary make everybody leave the building immediately and go to the muster point for a roll call.
- Call 999 or 112 Fire and Rescue Service, the nearest fire station is in Rickmansworth.
- Always report any fire to Site Agent and record, however small.

Muster Point : See local Fire Management Plans

DESIGNATED SMOKING / MOBILE PHONE AREAS

23

- The smoking area will be indicated with signage. Please dispose of your cigarette butts in the buckets provided and do not throw them on the floor.
- Smoking will NOT be permitted anywhere on site other than the designated areas.
- Mobile phone usage - only use mobile phones in designated phone zones established at each work location or designated welfare areas except in emergencies .
- **NEVER** use mobile phones or devices, even hands-free or Bluetooth, when driving or operating plant and equipment.



The following is MANDATORY Personal Protective Equipment:

- Hard Hat – EN397. With Chin Strap. No hoodies to be worn on site under hard hat.
- High Visibility trousers and long sleeved top - Orange -GO/RT3279, EN343, EN471.
- Boots (Steel toe cap, metatarsal and mid sole Protection) – EN ISO 20345:2004 .
- Gloves – EN388, EN420, EN511 (Min: cut resistance C3).
- Light Eye Protection / Safety Glasses – EN166.
- Mandatory hearing protection
- Additional PPE will be required as task and site conditions dictate.
- Specific requirements will be detailed in the relevant Task Briefings.
- HS2 Branded PPE is not to be worn off site.



PPE

Appropriate High Quality PPE will be available to everyone in line with activity risk assessment and must be worn

PPE - Know Your Correct Hard Hat Colour

25



Yellow - All banksmen, vehicle marshals



Orange - Slings/Signallers



Black - Contractor working and non-working foremen/Supervisors (gangsters/charge hands)



White - Contractor Managers, all other contractor personnel/operatives



Blue - All Visitors not carrying out physical work



Green - Medical staff



Red - Trainees, apprentices or young persons (16 to 18 years old)



PPE

Appropriate High Quality PPE will be available to everyone in line with activity risk assessment and must be worn

All helmets must meet British Standard BS EN 397:2012

KEY SITE HAZARDS- General to all Work Locations - Pedestrian/Vehicle Interface

RED ZONE

PLANT & VEHICLES ONLY



STRICTLY NO ACCESS FOR PEDESTRIANS

WARNING

Only the Area Supervisor can give permission for specific and controlled access in this area.

Refer to the SITE PLAN and DAILY BRIEFINGS for more information regarding zonal control.

RIGHTWAY

AMBER ZONE

PLANT & PEDESTRIAN INTERFACE



CONTROLLED ACCESS FOR PEDESTRIANS

WARNING

Do not enter this zone unless you have gained permission (permit) from the Area Supervisor.

Unique ID:

Area Supervisor name:

Contact details:

Refer to the SITE PLAN and DAILY BRIEFINGS for more information regarding zonal control.

RIGHTWAY

GREEN ZONE

PEDESTRIANS ONLY



STRICTLY NO PLANT OR VEHICLES

WARNING

Only the Area Supervisor can give permission for controlled plant or vehicle access in this area.

Refer to the SITE PLAN and DAILY BRIEFINGS for more information regarding zonal control.

RIGHTWAY

PROHIBITED PLANT!



All work at height will be carried out within collective fall protection areas. Ladders and stepladders will not be accepted as working platforms.



High quality appropriate tools will be made available for all activities



Grinders under 125mm

Grinders above 125mm and alternative tools



Forward tipping dumpers



High quality appropriate tools will be made available for all activities



All-round Visibility Dumper

Single use slings are banned on ALIGN sites



Acetylene is BANNED from ALIGN sites



Suitable safer alternatives

- This covers all aspects of the environment, including the control of waste, stockpiled and stored materials on site, excavations in chalk, plant-fueling and storage, generators, the prevention or control of pollution, ecology and habitats.
- Everyone on site is responsible for looking after the environment and complying with ALIGN's Environment Management Plan (EMP) and HS2 Environmental Statement (ES), Environmental Minimum Requirements as well as ALIGN's Environmental and Sustainability Policies. These policies are available online and displayed on site office walls.
- ALIGN and HS2 procedures for environmental compliance are available from ALIGN upon request with ALIGN's on site Environmental Manager being:

Alastair Mackay (Viaduct)

amackay@alignjv.com

07740 656 752

Adam Cockayne (South Portal)

acockayne@alignjv.com

07915 926305

- **Spill Kits.** Emergency response **spill kits** allow fast action to prevent damage to, work premises, the environment and your reputation. **Spill kits** are available in several application types, from simple **spills** to more problematic leaks such as chemicals and oils.
- **Basic spill kit contents list:**
 - Protective clothing (gloves, overalls, overshoes, safety goggles);
 - Absorbent materials (paper towels, spill pads, spill socks);
 - Disposal bags with tape or twist ties;
 - Dustpan and polypropylene broom; and
 - Container for waste.



Noise can be the single largest source of complaints from local residents and the Council. In order to be a 'good neighbour' and avoid enforcement action a number of recommendations are made:

- Switch off engines on plant when they are not being used
- Screen generators or source quieter generators wherever practicable
- Do not play radios or conduct shouted conversations always act in a courteous manner as to not disturb our neighbours
- All static plant should be screened using mobile noise screens where practicable
- Mobile plant working in one place for more than half a day should be screened or enclosed when practicable
- If any complaints are received from local residents, please immediately contact the ALIGN site team
- All plant, equipment and noise control (e.g. barriers) used will be maintained in good working order
- Any plant, equipment or noise control found to be defective will not be operated until repaired



- All rubbish is legally classified as waste and ALIGN has a legal responsibility to ensure it is disposed of safely.
- Reduce, Re-use, Recycle, Dispose.
- All rubbish must be correctly disposed of in the designated areas of the site, in the relevant bins or skips provided on site.
- Do not mix hazardous and non-hazardous waste.
- If contamination/waste is identified on site, this should be reported immediately to the ALIGN site team.
- Ensure all food waste is placed in the designated bins provided in the welfare facilities.



SITE ACCESS AND CONTROL OF WORK LOCATIONS

32

- All work locations are under the control of the appointed supervisors.
- Persons are only to enter work locations upon authorization being agreed by the appointed supervisor.
- Work locations can be dangerous places for non skilled personnel so respect the instructions given by the works team whilst they undertake their works.
- If access is granted by the works supervisor, you will be briefed upon and signed up to the works locations POWRA.



- All site personnel are to sign-in and sign-out of each shift at the relevant work location.
- All site personnel must sign onto an approved method statement and attend a daily shift briefing before commencing daily works.
- ALIGN operates a permit to work system for high risk activities such as:
 - ✓ Excavating / Digging / Breaking Ground.
 - ✓ Passing under or over Services
 - ✓ Hot Works.
 - ✓ Confined Space working.



KEY SITE HAZARDS – LOAD TEST PILE LOCATION 1&2

34

- Vehicles – interface with other road users including pedestrians and animals.
- Traffic management / Transport of plant and materials to and from site and around site- always stay upon designated transit routes/track matting as applicable.
- Excavation - breaking ground / buried services.
- Overhead and Buried services.
- Crime and security.
- Manual handling
- Welfare facilities, hygiene etc. Static welfare at main compound, supplemented with mobile units at remote locations.
- Fly-tipped waste.
- Working near water. **No personnel are permitted within 5m of any water course.**
- Fire.



Risk Analysis

All Tasks and workstations will be subject to a Risk Analysis and Risk Assessment and for construction this will be completed at the Point of Work


35



36




CSP COMPOUND- General arrangements

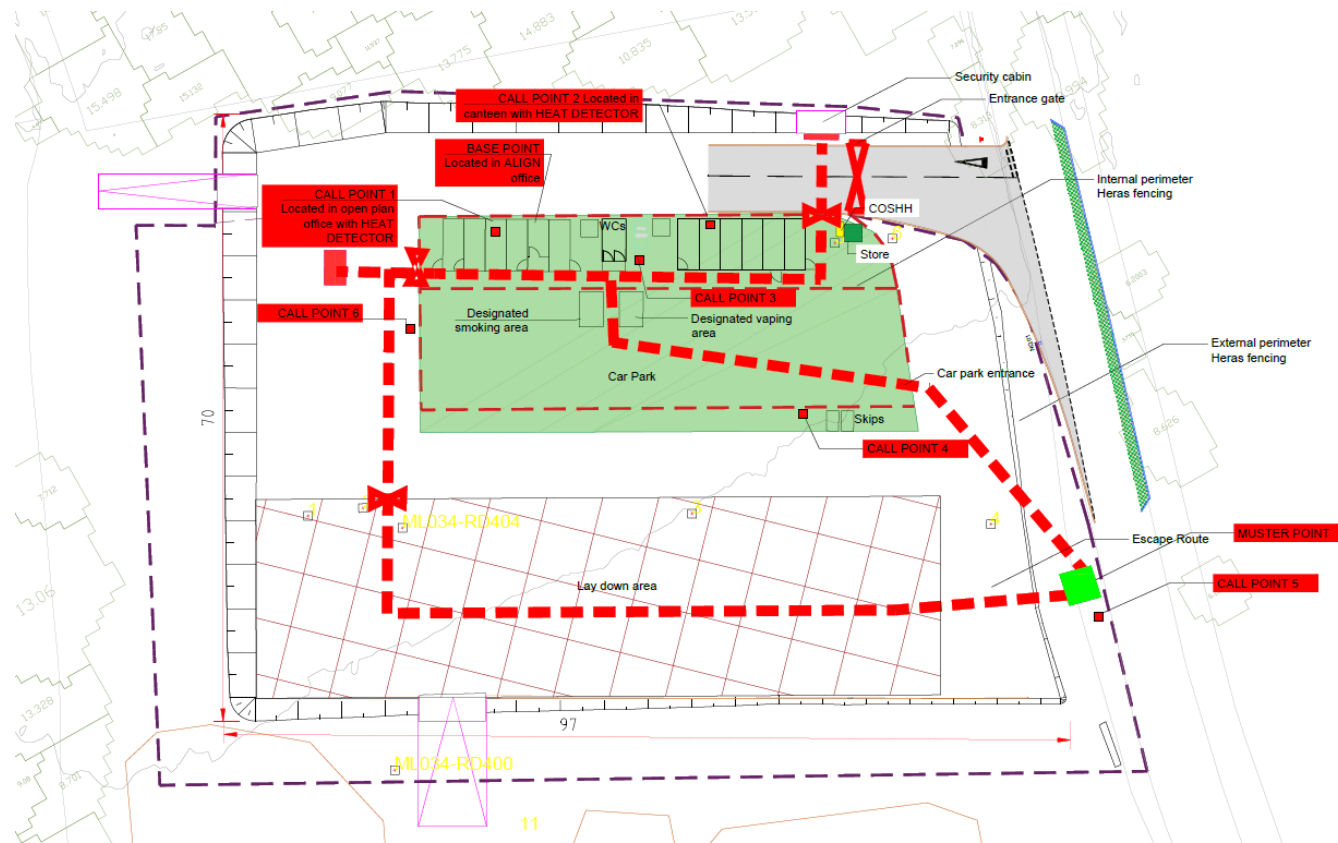

- Deliveries by vehicles over 3.5T are restricted to a maximum of 12 deliveries a day. This must not be exceeded.
- All deliveries are to be scheduled in advance with ALIGN as to ensure compliance to the above is maintained.
- Deliveries are prohibited between 08:00hrs - 09:00hrs, and between 15:00hrs and 16:00hrs, as to avoid local peak traffic times-
- Particular caution is urged when traveling upon the local public highway due to the presence of vulnerable road users, particularly at the following local locations: **Epilepsy Society, Woodland Care Home, Robertswood School and Montessori Nursery.**

- The Early Works locations are very spread out and therefore will have varying numbers of neighbours and public nearby.
- Always act with courtesy and consideration towards our neighbours and the public.
- Only park vehicles in agreed locations.
- Please ensure all plant, equipment, fencing and works areas are kept safe and secure.
- Site security is of paramount importance – all incidents and near misses must be reported to the ALIGN site team immediately.
- Be aware of HS2 press, public protests and public questioning when on site. Please direct all public relations and enquiries to the ALIGN site team and use your HS2 helpline card.

SOUTH PORTAL- General arrangements

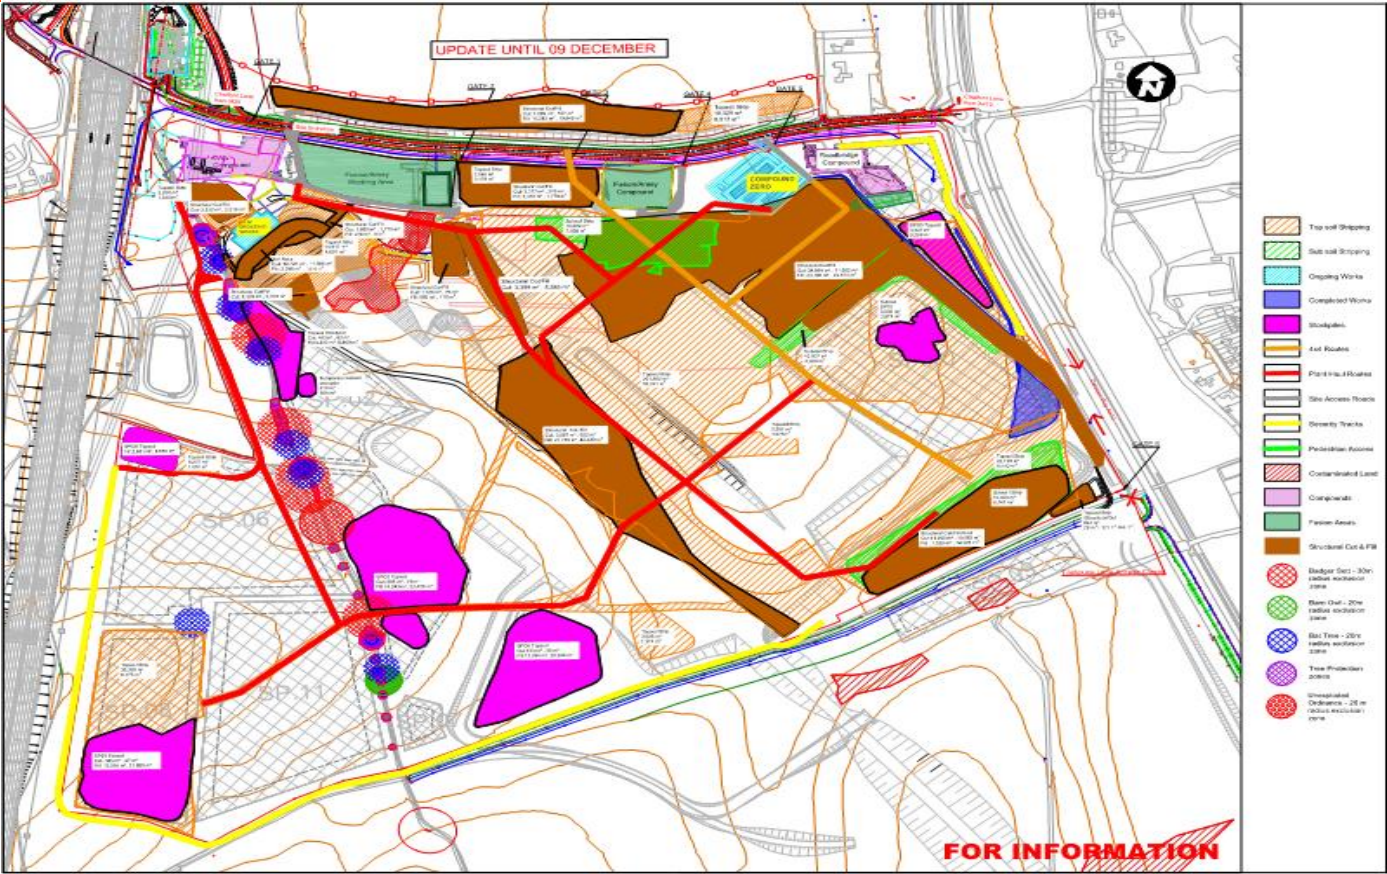

- Use of M25 Slip Roads- vehicles using this route must be Chapter 8 compliant
- Interface with other contractors and third parties- designated haul roads to be used and work areas barriered off.
- Vehicle/Plant interface with pedestrians- pedestrians to use designated Green Routes ONLY. Plant to give way at crossing points.
- Stability of haul roads and working platforms.
- Operation of heavy mobile plant- only trained/authorised operators to operate plant and equipment.
- Site Security- everyone to sign in and out of site, work areas to be left secured with plant/equipment secured when not in use.

In the event of a protester or trespassers gaining access to the Site or Working Area, the following actions are to be followed:

Stop works in the vicinity of the protestor(s) and take any necessary actions to make the site safe and ensure any protestor(s) are not at risk.
Site security will call the police and request they attend the site.
Site security will notify the HS2 Helpdesk.

Do not get confrontational with Trespassers or Protesters. Remain polite and follow the procedures at all times.

Do not lay hands on any trespasser or protester unless they are about to endanger themselves or others and there is no other way of preventing this happen. If you are required to stop a trespasser or protester from endangering life, explain the danger and request they stop. If they refuse and continue, use no more **force** than is **reasonably** necessary to prevent injury.

Do not end up in court, unless someone is about to harm themselves or others, leave the physical removal of Trespassers and Protesters to the Specialist Security Services and the Police.



All Construction Sites are targets for organised criminal activity. The following basic measures are to be followed to help prevent theft from occurring:

- Do not leave any Plant Equipment / Vehicles unattended off site
- Return and secure all Plant Equipment / Vehicles on site when not in use
- Secure any keys to Plant Equipment / Vehicles in the site office or with site security
- If you are taking Plant Equipment / Vehicles off site, ensure Site Security/Site Management are aware of your destination, what equipment is being removed and when you will be returning
- If you see anyone attempting to steal site equipment report it to site security and /or the police immediately.

Do not attempt to intervene. If the person(s) are in a vehicle, try and note the registration, try and get a description of the person(s). Consider using your phone and take a photo.



The following basic personal security measures should be adopted by all staff:

- When working off-site, ensure someone knows where you are and is able to contact you.
- Ensure you always have the means to call for assistance if required (radio/phone)
- Do not discuss where you are working or the project you are working on with anyone who does not have a 'need to know'. Talking openly about this project could attract unwanted attention from protester, media, criminals and local community
- Do not wear anything off-site that draws attention to the project you are working like branded PPE. Where possible, don't travel to and from site in PPE .
- If approached by anyone you do not recognise and are asked questions about the HS2 project do not discuss the project. They could be protesters, local community, criminals or the media, looking to gather information. Please refer them to the HS2 Helpline number on your card.
- If you are approached by the media, report it to site security for onward reporting to the HS2 Helpdesk.

HS2 Helpdesk on 08081 434434
Report any suspicious behaviour

All staff and vehicles entering / exiting the site may be subject to random search. Please be patient with security staff if there is a queue to access/egress the site, they have a job to perform and are also looking after your security.

Be Warned! Anyone caught removing any equipment or vehicles from site without authority will be reported to the site manager, the police and may face dismissal from the project.

Emergency Contact Details

- **HS2 Helpdesk** on 08081 434434
- **Police** on 999/112
- **ALIGN Security Manager(s)**
 - Jeremy Dawes (07985 298772) - jdawes@trustredline.co.uk
 - Steve McMenemy (07415 115815) - smcmenemy@trustredline.co.uk
- **ALIGN Project Manager**
 - Clement Chasset (07903 222884) - c.chasset@alignjv.com
- **ALIGN Project Manager**
 - Steve Meecham (07932584044) - s.meecham@alignjv.com
- **ALIGN Project Manager**
 - Mick O'Hare (07384234480) - m.o,hare@alignjv.com
- **HS2 Area Central Security Manager**
 - John Walker (07584 888186) - john.walker@hs2.org.uk

Your ALIGN Health and Safety contacts are:

Neil Hancox (ALIGN):	07791 275988
Peter Day (ALIGN):	07734 335908
Justin Otley (ALIGN):	07872 814894
Cary Pritchard (ALIGN):	07939057953
Isabelle Lelievre (ALIGN):	07939057953

The Align Health and Safety Policy is displayed upon the Notice Board.

Upon Completion of this induction and the HS2 Safe@ Heart Presentation, you will be issued with a coloured INDUCTION STICKER to be displayed upon your hard hat.

The displaying of the INDUCTION STICKER acknowledges that you have attended both the ALIGN Workers Induction and the HS2 Safe@Heart Presentation, as well as presented all required induction information to ALIGN.

PLEASE NOTE: For all workers, No ALIGN INDUCTION STICKER and NO Validate Card = NO ACCESS TO ANY OF THE WORK LOCATIONS.



Any Questions?

*.....Time for the
questionnaire.*